





FAG


22213-E1-XL-K-C4

Spherical Roller Bearing

Spherical roller bearings 222...-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

X-life

Informacje techniczne

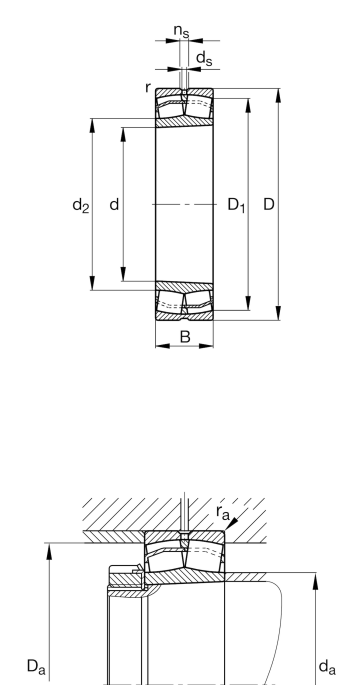

Twoja aktualna wersja produktu

Design	E1	Without central rip
Bore type	K	Tapered, taper 1:12
Cage	JPA	Sheet metal cage
Radial internal clearance	C4 (Group 4)	Internal clearance larger than C3
Relubrication feature	Standard	

Main Dimensions & Performance Data

d	65 mm	Bore diameter
D	120 mm	Outside diameter
B	31 mm	Width
C _r	202.000 N	Basic dynamic load rating, radial
C _{0r}	210.000 N	Basic static load rating, radial
C _{ur}	26.500 N	Fatigue load limit, radial
n _G	7.000 1/min	Limiting speed
n _{gr}	4.200 1/min	Reference speed

≈m	1,476 kg	Masa
----	----------	------



Mounting dimensions

$d_{a\ min}$	74 mm	Minimum diameter shaft shoulder
$d_{a\ max}$	79 mm	Maximum diameter of shaft shoulder
$D_{a\ max}$	111 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	1,5 mm	Maximum recess radius
$d_{b\ min}$	70 mm	Minimum cavity diameter of the sleeve
$B_{a\ min}$	8 mm	Minimum cavity width of the sleeve

Dimensions

r_{min}	1,5 mm	Minimum chamfer dimension
D_1	107,3 mm	Bore diameter outer ring
d_2	79,1 mm	Raceway diameter of the inner ring
d_s	3,2 mm	Diameter lubrication hole
n_s	6,5 mm	Width of lubricating groove

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	200 °C	Operating temperature max.

Calculation factors

e	0,24	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,81	Dynamic axial load factor
Y_2	4,19	Dynamic axial load factor
Y_0	2,75	Static axial load factor

Additional information

H313	Adapter sleeve
AH313G	Withdrawal sleeve



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna