

FAG


23044-BE-XL-H151B

Spherical Roller Bearing

Spherical roller bearings 230...-E1, main dimensions to DIN 635-2

X-life

Informacje techniczne

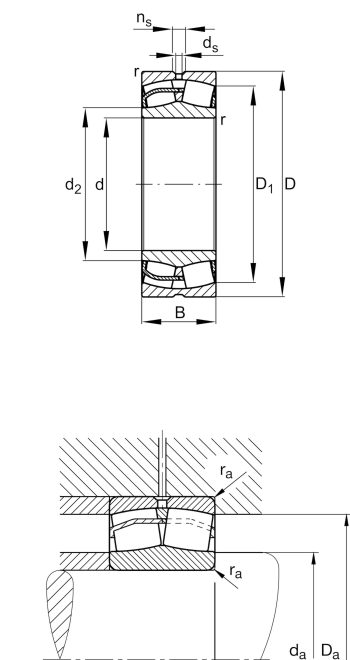

Twoja aktualna wersja produktu

Design	BE	With lose center lip ring
Bore type	Z	Cylindrical
Cage	JPB	Sheet metal cage
Radial internal clearance	CN (Group N)	Normal internal clearance
Relubrication feature	Standard	
Locating feature, bearing outer ring	H151B	2 Locking features, bearing outer ring

Main Dimensions & Performance Data

d	220 mm	Bore diameter
D	340 mm	Outside diameter
B	90 mm	Width
C _r	1.260.000 N	Basic dynamic load rating, radial
C _{0r}	1.900.000 N	Basic static load rating, radial
C _{ur}	182.000 N	Fatigue load limit, radial
n _G	2.230 1/min	Limiting speed
n _{gr}	1.450 1/min	Reference speed
≈m	29,6 kg	Masa



Mounting dimensions

$d_{a\ min}$	232,4 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	327,6 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	2,5 mm	Maximum recess radius

Dimensions

$r_{\min}$	3 mm	Minimum chamfer dimension
D_1	304,5 mm	Bore diameter outer ring
d_2	248,8 mm	Raceway diameter of the inner ring
d_s	8 mm	Diameter lubrication hole
n_s	15 mm	Width of lubricating groove

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

Calculation factors

e	0,24	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,81	Dynamic axial load factor
Y_2	4,19	Dynamic axial load factor
Y_0	2,75	Static axial load factor



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Łożysko gabarytowe
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna