



FAG


32240-XL-DF-A400-450>A

Tapered roller bearing set

Tapered roller bearing set 322...-DF, X-arrangement

X-life

Informacje techniczne

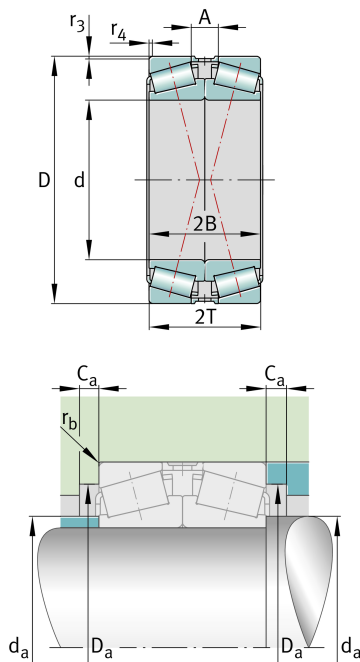

Twoja aktualna wersja produktu

|                          |          |                                                 |
|--------------------------|----------|-------------------------------------------------|
| Tolerance class          | PN       | Normal (ISO 492:2023)                           |
| Heat treatment           | Standard |                                                 |
| Cage                     | Standard | Sheet steel cage, window cage, roller-guided    |
| Axial internal clearance | A400-450 | Axial internal clearance between 400 and 450 µm |
| Quality level            | XL       | X-life                                          |
| Matched arrangement      | F        | X arrangement                                   |
| Version code             | >A       | Not marked on bearing                           |
| Number of rows           | 2        | Double-row design                               |

Main Dimensions & Performance Data

|                 |             |                                   |
|-----------------|-------------|-----------------------------------|
| d               | 200 mm      | Bore diameter                     |
| D               | 360 mm      | Outside diameter                  |
| 2B              | 196 mm      | Inner ring total width            |
| 2T              | 208 mm      | Outer ring total width            |
| C <sub>r</sub>  | 2.700.000 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 4.150.000 N | Basic static load rating, radial  |
| C <sub>ur</sub> | 520.000 N   | Fatigue load limit, radial        |
| n <sub>G</sub>  | 2.230 1/min | Limiting speed                    |
| n <sub>gr</sub> | 890 1/min   | Thermal speed rating              |
| ≈m              | 88,7 kg     | Masa                              |



Mounting dimensions

|         |        |                                      |
|---------|--------|--------------------------------------|
| d a max | 226 mm | Maximum diameter of shaft shoulder   |
| D a min | 302 mm | Minimum diameter of housing shoulder |
| D a max | 342 mm | Maximum diameter of housing shoulder |
| C a min | 11 mm  | Minimum axial space                  |
| r b max | 4 mm   | Maximum fillet radius of housing     |

Dimensions

|            |       |                                                   |
|------------|-------|---------------------------------------------------|
| r 3, 4 min | 4 mm  | Minimum chamfer dimension of outer ring back face |
| A          | 44 mm | Width of spacer                                   |

Temperature range

|       |        |                            |
|-------|--------|----------------------------|
| T min | -30 °C | Operating temperature min. |
| T max | 200 °C | Operating temperature max. |

Calculation factors

|     |      |                                                                                  |
|-----|------|----------------------------------------------------------------------------------|
| e   | 0,41 | Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y |
| Y 1 | 1,66 | Dynamic axial load factor                                                        |
| Y 2 | 2,47 | Dynamic axial load factor                                                        |
| Y 0 | 1,62 | Static axial load factor                                                         |

Właściwości

|                                                                                     |                                   |
|-------------------------------------------------------------------------------------|-----------------------------------|
|  | Obciążenie promieniowe            |
|  | Obciążenie osiowe jednokierunkowe |
|  | Obciążenie osiowe dwukierunkowe   |
|  | Smarowanie smarem                 |
|  | Smarowanie olejem                 |
|  | Bez uszczelnienia                 |
|  | Łożysko gabarytowe                |