




FAG

6206-C-2Z-L069-CM>V

Deep groove ball bearing

Deep groove ball bearing 62...-C-2Z, single row, Generation C, shields, steel sheet metal cage

Informacje techniczne

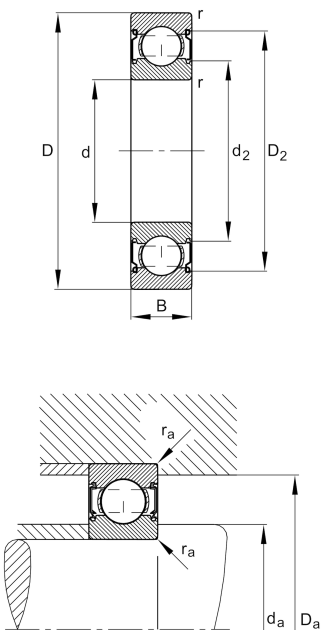

Twoja aktualna wersja produktu

Version code	>V	Not marked on bearing
Changed internal design	C	GenerationC
Sealing	2Z	Non-contact shield on both sides
Cage	JN	Steel sheet metal
Tolerance class	P6	Class 6 (ISO 492:2023)
Dimensional / heat stabilization	SN	Rings dimensional stabilized up to 120°
Lubricant	L069	Low noise high-temperature grease, interchangeable with grease L207
Radial internal clearance	CM (Group M)	Internal clearance limited for electric motors
Bore type	Z	Cylindrical

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	16 mm	Width
C _r	22.000 N	Basic dynamic load rating, radial
C _{0r}	11.300 N	Basic static load rating, radial
C _{ur}	770 N	Fatigue load limit, radial
n _G	15.100 1/min	Limiting speed
n _{gr}	13.400 1/min	Reference speed

≈m	0,192 kg	Masa
----	----------	------



Mounting dimensions

$d_{a \min}$	35,6 mm	Minimum diameter shaft shoulder
$D_{a \max}$	56,4 mm	Maximum diameter of housing shoulder
$r_{a \max}$	1 mm	Maximum fillet radius

Dimensions

$r_{\min}$	1 mm	Minimum chamfer dimension
D_1	52,67 mm	Shoulder diameter outer ring
D_2	54,91 mm	Caliber diameter outer ring
d_1	39,33 mm	Shoulder diameter inner ring
d_2	37,72 mm	Caliber diameter inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Calculation factors

f_0	13,8	Calculation factor
-------	------	--------------------

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Smarowanie smarem
	Uszczelnienie dwustronne