



FAG

7200-B-XL-2RS-TVP-UL


Angular contact ball bearing

Angular contact ball bearing 72..-B-XL-2RS-TVP, single row, X-life, seals, plastic cage



X-life

Informacje techniczne

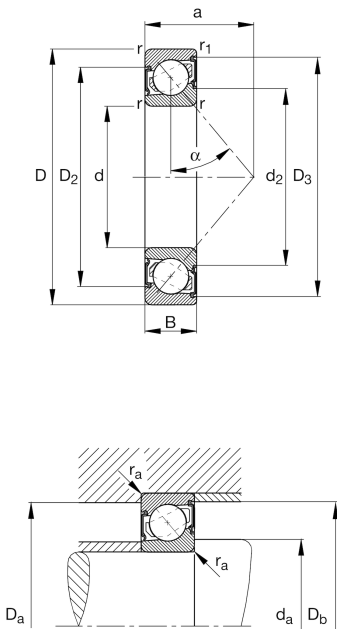

Twoja aktualna wersja produktu

Design variant	B	B
Sealing	2RS	Contact seal on both sides
Cage	TVP	Solid cage made of glass-fiber reinforced polyamid PA66
Tolerance class	P6	Class 6 (ISO 492:2023)
Dimensional / heat stabilization	S0	Rings dimensional stabilized up to 150°
Bearing with matched conditions for fitting in pairs	UL	Bearing set with light preload
Lubricant	GA14	Ball bearing grease, low noise

Main Dimensions & Performance Data

d	10 mm	Bore diameter
D	30 mm	Outside diameter
B	9 mm	Width
C _r	5.600 N	Basic dynamic load rating, radial
C _{0r}	2.600 N	Basic static load rating, radial
C _{ur}	179 N	Fatigue load limit, radial
n _G	16.100 1/min	Limiting speed
≈m	0,032 kg	Masa



Mounting dimensions

d _{a min}	14,2 mm	Minimum diameter of shaft shoulder
D _{a max}	25,8 mm	Maximum diameter of housing shoulder
D _{b max}	27,6 mm	Maximum diameter of housing shoulder
r _{a max}	0,6 mm	Maximum fillet radius of shaft
r _{a1 max}	0,3 mm	Maximum fillet radius of housing

Dimensions

r _{min}	0,6 mm	Minimum chamfer dimension
r _{1 min}	0,3 mm	Minimum chamfer dimension
D ₁	22,03 mm	Shoulder diameter on outer ring wide side face
D ₂	23,17 mm	Caliber diameter on outer ring wide side face
D ₃	25,42 mm	Caliber diameter on outer ring small side face
d ₁	18,26 mm	Shoulder diameter on inner ring wide side face
d ₂	15,52 mm	Caliber diameter on inner ring wide side face
a	12,9 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.

Additional information

V _{max}	-2 μm	Preload per set max.
Tol (+)	8 μm	Tolerance for axial clearance or preload per set
F _{V max}	38 N	Preload force



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne