**BKE.TSX25-D-H-SO**

Braking/clamping element

Braking and clamping element BKE.TSX..-D-H-SO, high design, hydraulic connector on top face, for linear recirculating roller bearing and guideway assembly


Informacje techniczne

Twoja aktualna wersja produktu

Size	25	
Version	D	
Design	H	
Oil feed	SO	Oil feed from above

Main Dimensions & Performance Data

H	40 mm	Height sytem
	with	Adapter plate
B	47 mm	Width of braking and clamping element
L	91 mm	Length braking and clamping element
	1.000 N	Clamping force
≈m	1,09 kg	Masa

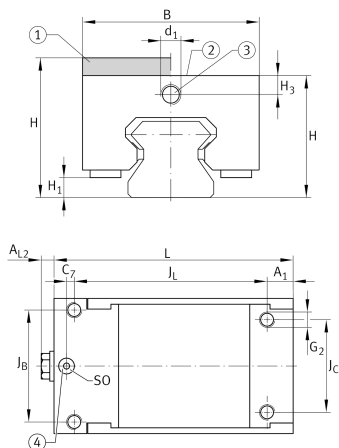



Dimensions

J _B	38 mm	Hole pattern
J _C	34 mm	Hole pattern
A ₁	10 mm	Distance
J _L	75 mm	Hole pattern
C ₇	0 mm	Distance
H ₁	6,2 mm	Space (system)
H ₃	6 mm	Mounting dimension
A _{L2}	5 mm	Distance
d ₁	M6x1	Size thread
SO	7x1,5	O-ring
	6 mm	Max. diameter of the oil feed hole
G ₂	M6	Size thread above for DIN ISO 4762-12.9
M _A	17,4 Nm	Tightening torque above