**BKE.TSX45-D-H**

## Braking/clamping element

Braking and clamping element BKE.TSX...-D-H, high design, hydraulic connector on end face, for linear recirculating roller bearing and guideway assembly


## Informacje techniczne

## Twoja aktualna wersja produktu

|         |    |
|---------|----|
| Size    | 45 |
| Version | D  |
| Design  | H  |

## Main Dimensions &amp; Performance Data

|    |         |                                       |
|----|---------|---------------------------------------|
| H  | 70 mm   | Height sytem                          |
|    | with    | Adapter plate                         |
| B  | 85 mm   | Width of braking and clamping element |
| L  | 141 mm  | Length braking and clamping element   |
|    | 4.300 N | Clamping force                        |
| ≈m | 5,12 kg | Masa                                  |

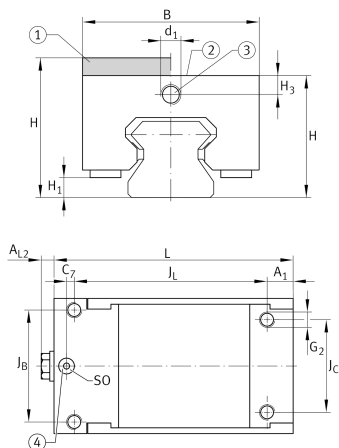



Dimensions

|                 |         |                                         |
|-----------------|---------|-----------------------------------------|
| J <sub>B</sub>  | 70 mm   | Hole pattern                            |
| J <sub>C</sub>  | 60 mm   | Hole pattern                            |
| A <sub>1</sub>  | 15 mm   | Distance                                |
| J <sub>L</sub>  | 113 mm  | Hole pattern                            |
| H <sub>1</sub>  | 11,8 mm | Space (system)                          |
| H <sub>3</sub>  | 10 mm   | Mounting dimension                      |
| A <sub>L2</sub> | 5 mm    | Distance                                |
| d <sub>1</sub>  | M8x1    | Size thread                             |
| G <sub>2</sub>  | M10     | Size thread above for DIN ISO 4762-12.9 |
| M <sub>A</sub>  | 83 Nm   | Tightening torque above                 |