




BPP-100T-SOLENOID-VALVE

Mobile hydraulic device

BETEX device for mounting/dismounting of tapered or cylindrical roller bearing units in wheelset bearings of rail vehicles, with solenoid valve, proceed way longitudinal

Informacje techniczne

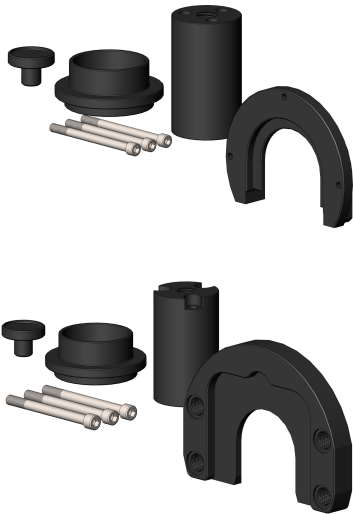

Twoja aktualna wersja produktu

|        |          |                       |
|--------|----------|-----------------------|
| Series | BPP/BPPS | BEARING PULLER/PUSHER |
|--------|----------|-----------------------|

Technical data

|         |                  |                                                           |
|---------|------------------|-----------------------------------------------------------|
| U       | 230 V            | Voltage                                                   |
|         | AC power         | Current type                                              |
| I       | 12 A             | Amperage                                                  |
| f       | 50 – 60 Hz       | Power frequency                                           |
| F c max | 660 kN           | Max. contact force cylinder                               |
| s c max | 392 mm           | Max. working stroke cylinder                              |
| P max   | 700 bar          | Max. operating pressure                                   |
|         | 370 – 1050       | Working height range [bottom – center axis cylinder] (mm) |
|         | 2210 x 652 x 900 | Dimensions [LxWxH] (mm)                                   |
| ≈m      | 560 kg           | Masa                                                      |

Functions

|                                                                                                                    |                      |
|--------------------------------------------------------------------------------------------------------------------|----------------------|
| electrically driven<br>hydraulic unit for<br>function main<br>cylinder and height<br>adjustment, remote<br>control | Functional principle |
| hydraulically by<br>means of aggregate                                                                             | Height adjustment    |
| 2 swivel castors<br>with brake function,<br>2 fixed castors                                                        | Castors              |



### Additional information

Product is manufactured to order. Request with specification of the application case to customer service.

Availability

only in conjunction with bearing/ application-specific tool set (not included in delivery, separate on request)

Usability