




EGW22-E40-B [🔗](#)

Thrust washer

Thrust washer, maintenance-free, material in accordance with ISO 3547-4, with bronze backing



Informacje techniczne




Twoja aktualna wersja produktu

|                        |                  |                                    |
|------------------------|------------------|------------------------------------|
| Maintenance            | Maintenance free |                                    |
| Material sliding Layer | E40              | Maintenance-free sliding layer E40 |
| Material back          | B                | Bronze backing                     |

Main Dimensions & Performance Data

|                 |           |                                  |
|-----------------|-----------|----------------------------------|
| D <sub>i</sub>  | 22 mm     | Inner diameter                   |
| s <sub>3</sub>  | 1,5 mm    | Wall thickness                   |
| C <sub>a</sub>  | 106.000 N | Basic dynamic load rating, axial |
| C <sub>0a</sub> | 188.000 N | Basic static load rating, axial  |
| D <sub>o</sub>  | 38 mm     | Outer Diameter                   |
| ≈m              | 9,1 g     | Masa                             |

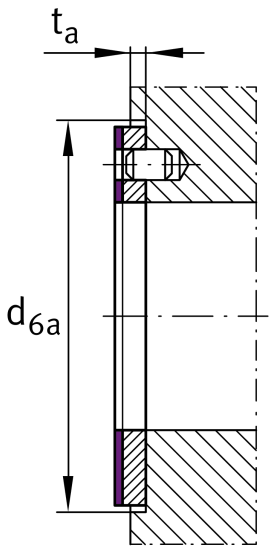

Dimensions

|         |          |                                          |
|---------|----------|------------------------------------------|
| J       | 30 mm    | Pitch circle                             |
| d 1     | 3 mm     | Fixing hole diameter                     |
| t a     | 1 mm     | Mounting dimension                       |
| d 6a    | 38 mm    | Mounting dimension d_6a                  |
| D o UT  | -0,25 mm | Outside diameter, lower tolerance        |
| D i OT  | 0,25 mm  | Inner diameter, upper tolerance          |
| D i UT  | 0 mm     | Inner diameter, lower tolerance          |
| D o OT  | 0 mm     | Outside diameter, upper tolerance        |
| s 3 OT  | 0 mm     | Wall thickness, upper tolerance          |
| s 3 UT  | -0,05 mm | Wall thickness, lower tolerance          |
| J OT    | 0,12 mm  | Pitch circle, upper tolerance            |
| J UT    | -0,12 mm | Pitch circle, lower tolerance            |
| d 1 OT  | 0,4 mm   | Fixing hole diameter, upper tolerance    |
| d 1 UT  | 0,1 mm   | Fixing hole diameter, lower tolerance    |
| t a OT  | 0,2 mm   | Mounting dimension, upper tolerance      |
| t a UT  | -0,2 mm  | Mounting dimension, lower tolerance      |
| d 6a OT | 0,12 mm  | Mounting dimension d_6a, upper tolerance |
| d 6a UT | 0 mm     | Mounting dimension d_6a, lower tolerance |

Temperature range

|       |         |                            |
|-------|---------|----------------------------|
| T min | -200 °C | Operating temperature min. |
| T max | 280 °C  | Operating temperature max. |



### Właściwości

-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Bez uszczelnienia
-  Ochrona przed korozją
-  Mała przestrzeń zabudowy