




F-673270.05.TILL

Bearing

Schaeffler Field Pro Disk Harrow Units

Informacje techniczne

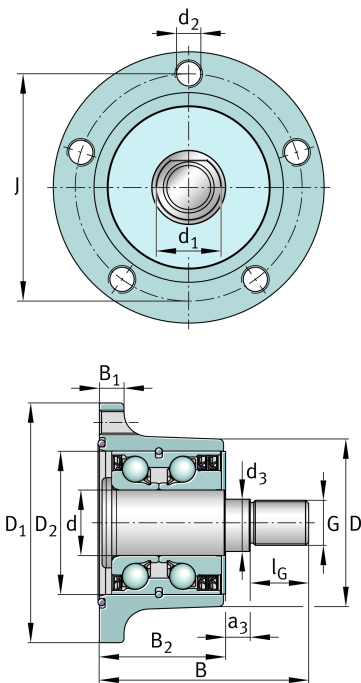

Main Dimensions & Performance Data

|                 |          |                                   |
|-----------------|----------|-----------------------------------|
| d               | 32 mm    | Bolt diameter                     |
| D               | 81,6 mm  | Outer diameter housing            |
| D <sub>1</sub>  | 117 mm   | Diameter flange                   |
| B               | 102 mm   | Total height unit                 |
| C <sub>r</sub>  | 50.000 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 40.000 N | Basic static load rating, radial  |

Mounting dimensions

|                |          |                               |
|----------------|----------|-------------------------------|
| J              | 98 mm    | Pitch circle diameter (holes) |
| d <sub>1</sub> | 28 mm    | Diameter adapter              |
| d <sub>2</sub> | M12x1,25 | Fixing bore metric            |
| d <sub>3</sub> | 25,5 mm  | Length locking device         |
| G              | M22x1,5  | Connection thread             |
| l <sub>G</sub> | 28,5 mm  | Length thread                 |
| a <sub>3</sub> | 12 mm    | Width of adapter              |
| n              | 5        | Number of screwing holes      |



### Dimensions

|     |         |                        |
|-----|---------|------------------------|
| D 2 | 70 mm   | Outer diameter bearing |
| B 1 | 12 mm   | Thickness of flange    |
| B 2 | 61,5 mm | Height housing         |