



**FLCTEY35-XL**

Flanged housing unit

Housing units FLCTEY, two-bolt flanged housing units, cast iron, grub screws in inner ring, P seals, without relubrication facility

X-life

Informacje techniczne

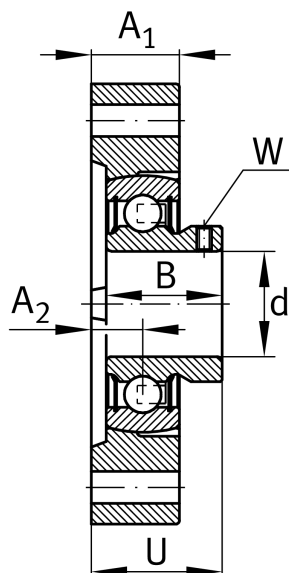

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	35 mm	Bore diameter
L	94 mm	Flange width
H	126 mm	Height flange
U	37,9 mm	Total height unit
C _r	27.500 N	Basic dynamic load rating, radial
C _{0r}	15.300 N	Basic static load rating, radial
C _{ur}	800 N	Fatigue load limit, radial
≈m	0,91 kg	Masa

Mounting dimensions

J	100 mm	Distance fixing bore
J	100 mm	Pitch circle diameter (holes)
N	11,5 mm	Fixing bore
n	2	Number of screwing holes



Dimensions

A ₁	22 mm	Thickness of flange
A ₂	12,4 mm	Distance raceway
d ₃	37,5 mm	Outside diameter eccentric locking collar

Additional information

1	Number of housings
LCTE07	Housing
AY35-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.