

IMAGE
COMING SOON**GLCTE30-FA125** [↗](#)

Flanged housing unit

Flanged housing unit GLCTE...-FA125

Informacje techniczne

Twoja aktualna wersja produktu



Material	GG	Grey cast iron
Manufacturing instruction	FA125	Unit with Corrotect coating, corrosion-resistant

Main Dimensions & Performance Data

d	30 mm	Bore diameter
L	84 mm	Flange width
H	112,5 mm	Height flange
U	38,1 mm	Total height unit
C _r	19.500 N	Basic dynamic load rating, radial
C _{0r}	11.300 N	Basic static load rating, radial
≈m	0,76 kg	Masa

Mounting dimensions

J	90,5 mm	Distance fixing bore
N	11,5 mm	Fixing bore
W	4 mm	Width across flats
n	2	Number of screwing holes

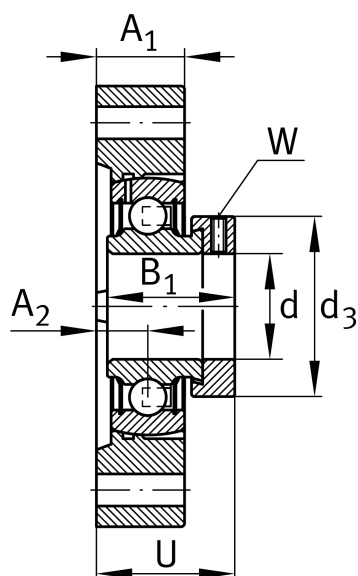



Dimensions

A ₁	22,5 mm	Thickness of flange
A ₂	11,4 mm	Distance raceway
B ₁	35,8 mm	Locking collar total width
Q	M6	Connection thread for lubrication
d ₃	44 mm	Outside diameter eccentric locking collar

Additional information

1	Number of housings
GEHGLCTE06-GG-FA125.1	Housing
GRAE30-XL-NPP-B-FA125.5	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.