



IMAGE
COMING SOON




GLCTE35-TV-FA125.5

Flanged housing unit

Flanged housing unit GLCTE...-TV

Informacje techniczne

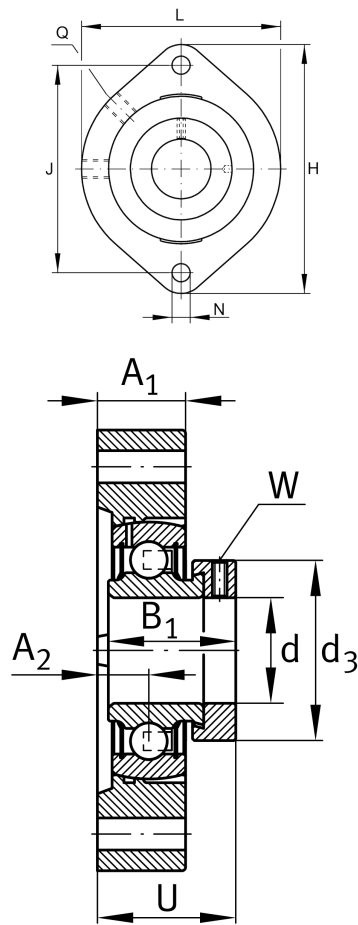

Twoja aktualna wersja produktu

Material	TV	Plastic
Manufacturing instruction	FA125.5	Bearing with Corroprotect coating

Main Dimensions & Performance Data

d	35 mm	Bore diameter
L	94 mm	Flange width
H	126 mm	Height flange
U	42 mm	Total height unit
C _r	22.500 N	Basic dynamic load rating, radial
C _{0r}	12.500 N	Basic static load rating, radial
C _{0r G}	12.600 N	Load carrying capacity (housing)
≈m	0,66 kg	Masa

Mounting dimensions

J	100 mm	Distance fixing bore
N	11,5 mm	Fixing bore
n	2	Number of screwing holes



Dimensions

A ₁	22,5 mm	Thickness of flange
A ₂	12,5 mm	Distance raceway
B ₁	39 mm	Locking collar total width
Q	1/4-28 UNF	Connection thread for lubrication
d ₃	55 mm	Outside diameter eccentric locking collar

Additional information

1	Number of housings
GLCTE07-TV	Housing
GRAE35-NPP-B-FA107/125.5	Bearing designation
KASK07-S-G	Protecting cap

Temperature range

T _{min}	-35 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.