






FAG

HSS71907-C-T-P4S-UL [🔗](#)

High speed spindle bearing

High speed spindle bearing HSS719...-C, adjusted, in pairs or sets, contact angle $\alpha = 15^\circ$, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne

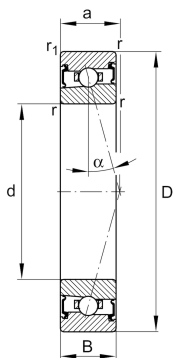

Twoja aktualna wersja produktu

Contact angle	C	Contact angle 15°
Sealing	2RSD	Non-contact sealed on both sides and greased "for life"
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing
Preload class	L	Preload light
Lubricant	GA21	Grease for super precision bearings, standard

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	55 mm	Outside diameter
B	10 mm	Width
C _r	6.400 N	Basic dynamic load rating, radial
C _{0r}	3.800 N	Basic static load rating, radial
C _{ur}	400 N	Fatigue load limit, radial
n _G Grease	36.000 1/min	Limiting speed for grease lubrication
n _G	56.000 1/min	Limiting speed
≈m	78,53 g	Masa



Mounting dimensions

d_a	40 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	51,5 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a\ max}$	0,6 mm	Maximum recess radius
$r_{a1\ max}$	0,15 mm	Maximum recess radius
a	11 mm	Distance between the apexes of the pressure cones

Dimensions

$r_{\min}$	0,6 mm	Minimum chamfer dimension
$r_{1\ \min}$	0,6 mm	Minimum chamfer dimension
α	15 °	Contact angle

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	80 °C	Operating temperature max.

Additional information

F_{VL}	23 N	Preload force light
F_{VM}	70 N	Preload force medium
F_{VH}	140 N	Preload force heavy
K_{aEL}	70 N	Lift-off force light
K_{aEM}	220 N	Lift-off force medium
K_{aEH}	459 N	Lift-off force heavy
c_{aL}	25 N/μm	Axial rigidity light
c_{aM}	39 N/μm	Axial rigidity medium
c_{aH}	53 N/μm	Axial rigidity heavy



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne