




FAG

JK0S040

Tapered roller bearing

Tapered roller bearings JK0S, integral tapered roller bearings, lip seal on one side, diameter series 0

Informacje techniczne

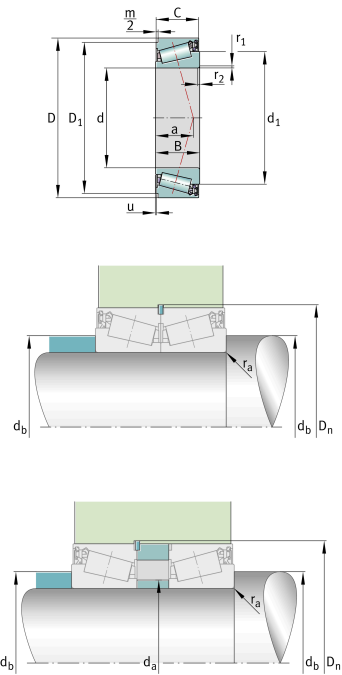

Twoja aktualna wersja produktu

Tolerance class	PN	Normal (ISO 492:2023)
Heat treatment	Standard	
Cage	TVP	Cage made of glass-fiber reinforced plastic, window cage
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	68 mm	Outside diameter
B	21 mm	Width, inner ring
C	20,5 mm	Width, outer ring
C _r	53.000 N	Basic dynamic load rating, radial
C _{0r}	71.000 N	Basic static load rating, radial
C _{ur}	8.300 N	Fatigue load limit, radial
n _G	4.950 1/min	Limiting speed
F _{BR}	12.900 N	Load carrying capacity of snap ring connection
	10.600 N	Maximum axial clamping force
≈m	0,301 kg	Masa



Mounting dimensions

d _a max	46 mm	Maximum diameter of shaft shoulder
d _b min	46 mm	Minimum diameter of shaft shoulder
r _a max	1 mm	Maximum fillet radius of shaft
D _n	69,5 mm	Groove diameter at housing
Δ D _n	0,19 mm	Upper limit deviation
Δ D _n	0 mm	Lower limit deviation

Dimensions

r _{1, 2} min	1 mm	Minimum chamfer dimension of inner ring back face
D ₁	64,4 mm	Diameter of groove
m/2	0,75 mm	Width of groove
a	16 mm	Distance between the apexes of the pressure cones
d ₁	53,8 mm	Guidance rib diameter of inner ring
u	0,03 mm	Stand out inner to outer ring
Δ u	0,05 mm	Upper limit deviation
Δ u	0 mm	Lower limit deviation

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	110 °C	Operating temperature max.

Calculation factors

e	0,37	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1,6	Dynamic axial load factor
Y ₀	0,88	Static axial load factor

Additional information

BR68	Snap ring
------	-----------



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Uszczelnienie jednostronne