



**K15X18X22-ZW-TV/0-7**

Needle roller cage assembly

Needle roller cage assembly K..-ZW-TV, two-row

Informacje techniczne

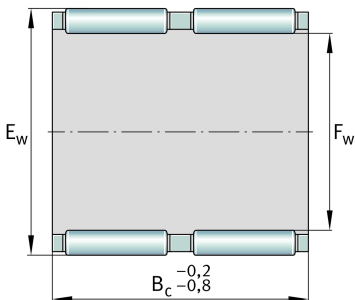

Twoja aktualna wersja produktu

|                |    |                             |
|----------------|----|-----------------------------|
| Cage           | TV | Plastic Cage made from PA66 |
| Number of rows | ZW | Double-row design           |

Main Dimensions & Performance Data

|                 |              |                                              |
|-----------------|--------------|----------------------------------------------|
| F <sub>w</sub>  | 15 mm        | Inner diameter of needle roller complement   |
| E <sub>w</sub>  | 18 mm        | Outside diameter of needle roller complement |
| B <sub>c</sub>  | 22 mm        | Width                                        |
| C <sub>r</sub>  | 9.400 N      | Basic dynamic load rating, radial            |
| C <sub>0r</sub> | 15.100 N     | Basic static load rating, radial             |
| C <sub>ur</sub> | 2.090 N      | Fatigue load limit, radial                   |
| n <sub>G</sub>  | 24.600 1/min | Limiting speed                               |
| n <sub>gr</sub> | 17.800 1/min | Reference speed                              |
| ≈m              | 4,56 g       | Masa                                         |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |



### Właściwości

---



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy