



K42X47X30-ZW [🔗](#)

Needle roller cage assembly

Needle roller cage assembly K..-ZW, two-row

Informacje techniczne

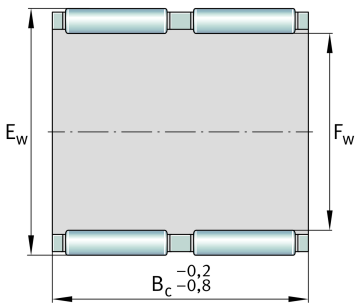

Twoja aktualna wersja produktu

Cage	JN	Steel sheet metal
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

F _w	42 mm	Inner diameter of needle roller complement
E _w	47 mm	Outside diameter of needle roller complement
B _c	30 mm	Width
C _r	33.500 N	Basic dynamic load rating, radial
C _{0r}	76.000 N	Basic static load rating, radial
C _{ur}	10.200 N	Fatigue load limit, radial
n _G	11.000 1/min	Limiting speed
n _{gr}	6.400 1/min	Reference speed
≈m	54,6 g	Masa

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	140 °C	Operating temperature max.



Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy