


K58X65X36-ZW [🔗](#)

Needle roller cage assembly

Needle roller cage assembly K..-ZW, two-row

Informacje techniczne

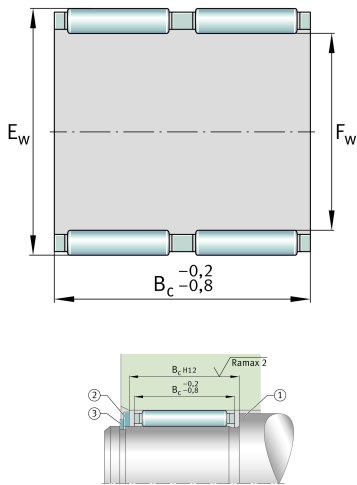

Twoja aktualna wersja produktu

|                |    |                   |
|----------------|----|-------------------|
| Cage           | JN | Steel sheet metal |
| Number of rows | ZW | Double-row design |

Main Dimensions & Performance Data

|                 |             |                                              |
|-----------------|-------------|----------------------------------------------|
| F <sub>w</sub>  | 58 mm       | Inner diameter of needle roller complement   |
| E <sub>w</sub>  | 65 mm       | Outside diameter of needle roller complement |
| B <sub>c</sub>  | 36 mm       | Width                                        |
| C <sub>r</sub>  | 49.000 N    | Basic dynamic load rating, radial            |
| C <sub>0r</sub> | 107.000 N   | Basic static load rating, radial             |
| C <sub>ur</sub> | 14.900 N    | Fatigue load limit, radial                   |
| n <sub>G</sub>  | 8.000 1/min | Limiting speed                               |
| n <sub>gr</sub> | 5.100 1/min | Reference speed                              |
| ≈m              | 0,124 kg    | Masa                                         |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 140 °C | Operating temperature max. |



### Właściwości

---



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy