


KBS12-PP-AS

Linear Ball Bearing

Linear ball bearings KBS.-PP-AS, machined range, adjustable, sealed on all sides, with relubrication facility, corrosion-resistant design possible

Informacje techniczne

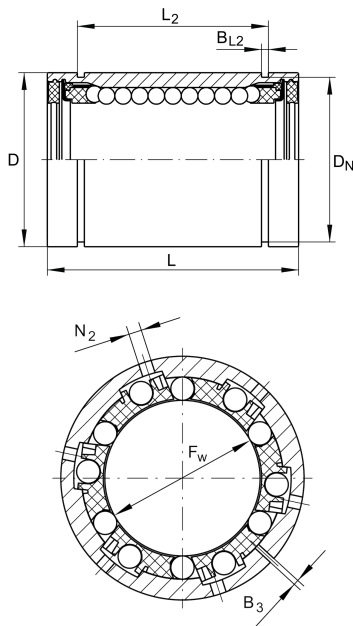

Twoja aktualna wersja produktu

|      |    |
|------|----|
| Size | 12 |
|------|----|

Main Dimensions & Performance Data

|                    |         |                     |
|--------------------|---------|---------------------|
| F <sub>W</sub>     | 12 mm   | Bore diameter       |
| D                  | 22 mm   | Outside diameter    |
| L                  | 32 mm   | Length              |
|                    | h12     | Tolerance           |
| C <sub>min</sub>   | 540 N   | Load capacity dyn.  |
| C <sub>0 min</sub> | 385 N   | Load capacity stat. |
| C <sub>max</sub>   | 640 N   | Load capacity dyn.  |
| C <sub>0 max</sub> | 570 N   | Load capacity stat. |
| ≈m                 | 35,79 g | Masa                |

Mounting dimensions

|                 |         |                      |
|-----------------|---------|----------------------|
| L <sub>2</sub>  | 22,6 mm |                      |
|                 | H13     | Tolerance            |
| B <sub>L2</sub> | 1,3 mm  |                      |
| B <sub>3</sub>  | 1 mm    |                      |
| D <sub>N</sub>  | 21 mm   |                      |
| N <sub>2</sub>  | 1,5 mm  |                      |
| χ               | 55 °    |                      |
|                 | 5       | Number of rows balls |