


KBS40-PP-AS

Linear Ball Bearing

Linear ball bearings KBS.-PP-AS, machined range, adjustable, sealed on all sides, with relubrication facility, corrosion-resistant design possible

Informacje techniczne

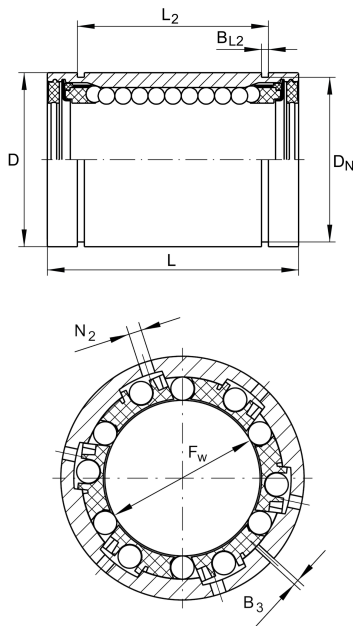

Twoja aktualna wersja produktu

Size 40

Main Dimensions & Performance Data

F _W	40 mm	Bore diameter
D	62 mm	Outside diameter
L	80 mm	Length
	h12	Tolerance
C _{min}	6.000 N	Load capacity dyn.
C _{0 min}	4.400 N	Load capacity stat.
C _{max}	6.400 N	Load capacity dyn.
C _{0 max}	5.600 N	Load capacity stat.
≈m	0,596 kg	Masa

Mounting dimensions

L ₂	60,3 mm	
	H13	Tolerance
B _{L2}	2,15 mm	
B ₃	1 mm	
D _N	59 mm	
N ₂	3 mm	
X	64 °	
	6	Number of rows balls