



25.08.2026, 01:28:33 UTC



SCHAEFFLER

KGBAO25-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; open design, sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

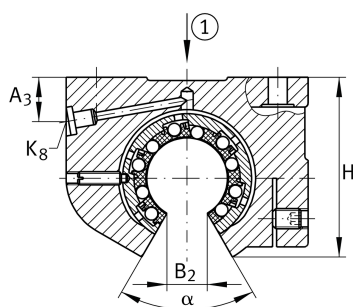

Twoja aktualna wersja produktu

Size	25
Seal	PP
Relubrication feature	AS

Technical data

	5	Ball rows
≈m	0,35 kg	Masa

Main Dimensions & Performance Data

F _W	25 mm	Diameter of ball complement
H	56 mm	Height
L	58 mm	Length
Tol L	h12	Tolerance
B	74 mm	Width
C	2.850 N	Load capacity dyn. C
C ₀	2.330 N	Load capacity stat. C0

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje



Mounting dimensions

J B	60 mm	
Tol J B	+ 0,2 mm	Upper tolerance
Tol J B	- 0,2 mm	Lower tolerance
A 5	37 mm	
Tol A 5	+ 0,01 mm	Upper tolerance
Tol A 5	- 0,01 mm	Lower tolerance
B 2	12,5 mm	
L 4	54 mm	
L 5	40 mm	
J L	40 mm	
Tol J L	+ 0,2 mm	Upper tolerance
Tol J L	- 0,2 mm	Lower tolerance
H 2	30 mm	Height shaft
Tol H 2	+ 0,01 mm	Upper tolerance
Tol H 2	- 0,01 mm	Lower tolerance
A 3	13 mm	
H 6	7,8 mm	
Tol H 6	- 0,5 mm	Tolerance
N 1	5,7 mm	
N 3	10 mm	
K 5	M5	
K 8	NIPA1	Lubrication nipple
W 1	3 mm	Width across flats
M W 1 max	3 Nm	Max. tightening torque
α	60 °	Angle