


KGBAO40-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; open design, sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

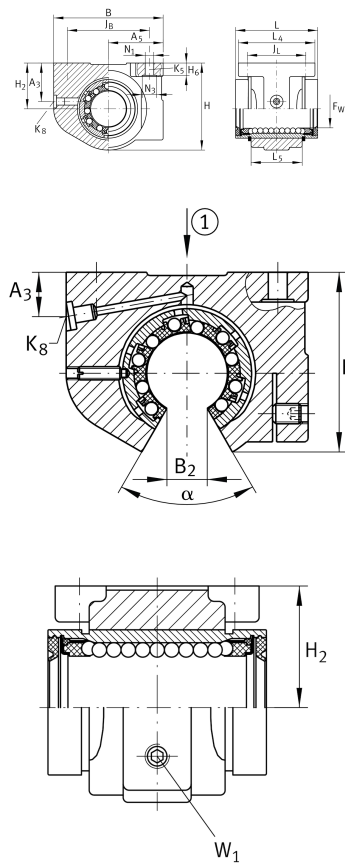

Twoja aktualna wersja produktu

Size	40
Seal	PP
Relubrication feature	AS

Technical data

	5	Ball rows
≈m	1,07 kg	Masa

Main Dimensions & Performance Data

F _w	40 mm	Diameter of ball complement
H	82,5 mm	Height
L	80 mm	Length
Tol L	h12	Tolerance
B	108 mm	Width
C	6.100 N	Load capacity dyn. C
C ₀	4.600 N	Load capacity stat. C0



Mounting dimensions

J B	86 mm	
Tol J B	+ 0,2 mm	Upper tolerance
Tol J B	- 0,2 mm	Lower tolerance
A 5	54 mm	
Tol A 5	+ 0,015 mm	Upper tolerance
Tol A 5	- 0,015 mm	Lower tolerance
B 2	18,2 mm	
L 4	78 mm	
L 5	56 mm	
J L	58 mm	
Tol J L	+ 0,2 mm	Upper tolerance
Tol J L	- 0,2 mm	Lower tolerance
H 2	45 mm	Height shaft
Tol H 2	+ 0,01 mm	Upper tolerance
Tol H 2	- 0,01 mm	Lower tolerance
A 3	18 mm	
H 6	11 mm	
Tol H 6	- 0,5 mm	Tolerance
N 1	9,2 mm	
N 3	15 mm	
K 5	M8	
K 8	NIPA2	Lubrication nipple
W 1	4 mm	Width across flats
M W 1 max	5 Nm	Max. tightening torque
α	54 °	Angle