



IMAGE  
COMING SOON





**KGHK14-B-PP-AS**

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

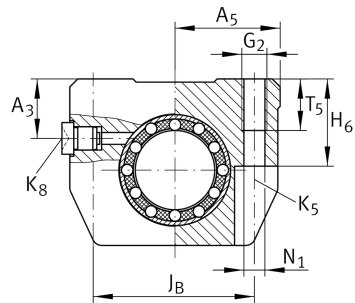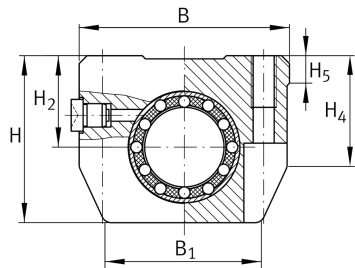


Twoja aktualna wersja produktu

|                       |    |
|-----------------------|----|
| Size                  | 14 |
| Version               | B  |
| Seal                  | PP |
| Relubrication feature | AS |

Main Dimensions & Performance Data

|                |         |                             |
|----------------|---------|-----------------------------|
| F <sub>W</sub> | 14 mm   | Diameter of ball complement |
| H              | 36,5 mm | Height                      |
| L              | 28,2 mm | Length                      |
| B              | 43 mm   | Width                       |
| C              | 690 N   | Dynamic load rating         |
| C <sub>0</sub> | 520 N   | Basic static load capacity  |
| ≈m             | 0,1 kg  | Masa                        |



Mounting dimensions

|         |            |                    |
|---------|------------|--------------------|
| J B     | 34 mm      |                    |
| Tol J B | + 0,15 mm  | Upper tolerance    |
| Tol J B | - 0,15 mm  | Lower tolerance    |
| B 1     | 34 mm      |                    |
| A 5     | 21,5 mm    |                    |
| H 2     | 18 mm      | Center height      |
| Tol H 2 | + 0,01 mm  | Upper tolerance    |
| Tol H 2 | - 0,014 mm | Lower tolerance    |
| H 4     | 28,1 mm    | Mounting Dimension |
| H 5     | 6,9 mm     |                    |
| T 5     | 11 mm      |                    |
| H 6     | 18 mm      | Mounting Dimension |
| A 3     | 13 mm      |                    |
| G 2     | M5         |                    |
| N 1     | 4,3 mm     |                    |
| N 3     | 10 mm      |                    |
| K 5     | M4         |                    |
| K 8     | NIPA1      | Lubrication nipple |