



IMAGE
COMING SOON





KGHK50-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

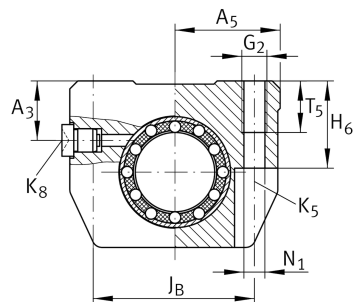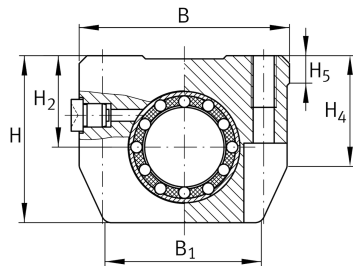


Twoja aktualna wersja produktu

Size	50
Version	B
Seal	PP
Relubrication feature	AS

Main Dimensions & Performance Data

F _W	50 mm	Diameter of ball complement
H	92 mm	Height
L	70,2 mm	Length
B	103 mm	Width
C	6.800 N	Dynamic load rating
C ₀	6.300 N	Basic static load capacity
≈m	1,3 kg	Masa



Mounting dimensions

J B	82 mm	
Tol J B	+ 0,15 mm	Upper tolerance
Tol J B	- 0,15 mm	Lower tolerance
B 1	74 mm	
A 5	51,5 mm	
H 2	47 mm	Center height
Tol H 2	+ 0,01 mm	Upper tolerance
Tol H 2	- 0,014 mm	Lower tolerance
H 4	62,3 mm	Mounting Dimension
H 5	10,9 mm	
T 5	26 mm	
H 6	46 mm	Mounting Dimension
A 3	28 mm	
G 2	M12	
N 1	10,5 mm	
N 3	20 mm	
K 5	M10	
K 8	NIPA2	Lubrication nipple