

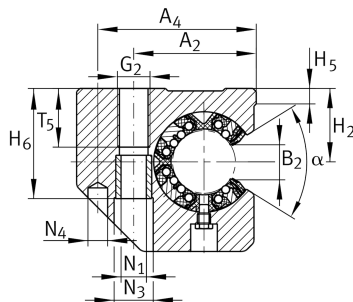


KGSCS25-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, open slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu


Size	25
Seal	PP
Relubrication feature	AS

Technical data

	6	Ball rows
≈m	0,8 kg	Masa

Main Dimensions & Performance Data

F _w	25 mm	Diameter of ball complement
H	72 mm	Height
L	58 mm	Length
B	75 mm	Width
C _{max}	3.950 N	Load capacity dyn.
C _{0 max}	4.300 N	Load capacity stat. C0max



Mounting dimensions

A 2	49 mm	
Tol A 2	+ 0,15 mm	Upper tolerance
Tol A 2	- 0,15 mm	Lower tolerance
A 4	64 mm	
A 5	21 mm	
Tol A 5	+ 0,01 mm	Upper tolerance
Tol A 5	- 0,01 mm	Lower tolerance
B 2	12,5 mm	
J L	36 mm	Distance
Tol J L	+ 0,15 mm	Upper tolerance
Tol J L	- 0,15 mm	Lower tolerance
L 6	45 mm	Distance
H 2	35 mm	Center height
Tol H 2	+ 0,008 mm	Upper tolerance
Tol H 2	- 0,016 mm	Lower tolerance
H 4	45 mm	
H 5	8,2 mm	
T 5	22 mm	Mounting Dimension
H 6	50,6 mm	
G 2	M12	
N 1	10,5 mm	
N 4	8 mm	
N 3	18 mm	
K 5	M10	
K 8	NIP5MZ	Lubrication nipple
W	3 mm	Width across flats
α	57 °	Angle