




KGSNS16-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu

Size 16

Seal PP

Relubrication feature AS

Technical data

8 Ball rows

≈m 0,2 kg Masa

Main Dimensions & Performance Data

F w 16 mm Diameter of ball complement


H 42 mm Height

L 37 mm Length

B 53 mm Width

C max 1.430 N Load capacity dyn.

C 0 max 1.550 N Load capacity stat.

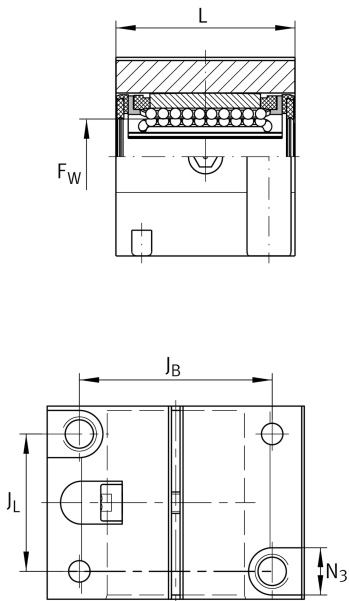

Mounting dimensions

J _B	40 mm	
B ₁	40 mm	
A ₅	26,5 mm	
Tol A ₅	+ 0,01 mm	Upper tolerance
Tol A ₅	- 0,01 mm	Lower tolerance
J _L	26 mm	Distance
Tol J _L	+ 0,15 mm	Upper tolerance
H ₂	22 mm	Center height
H ₄	29,3 mm	
H ₅	6,9 mm	
T ₅	13 mm	Mounting Dimension
H ₆	21 mm	Mounting Dimension
G ₂	M6	
N ₁	5,3 mm	Mounting Dimension
N ₄	4 mm	
N ₃	10 mm	Mounting Dimension
K ₅	M5	
K ₈	NIP4MZ	Lubrication nipple
W	3 mm	Width across flats