




KGSNS25-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu

Size 25

Seal PP

Relubrication feature AS

Technical data

8 Ball rows

≈m 0,63 kg Masa

Main Dimensions & Performance Data

F w 25 mm Diameter of ball complement


H 60 mm Height

L 58 mm Length

B 78 mm Width

C max 3.950 N Load capacity dyn.

C 0 max 4.300 N Load capacity stat.

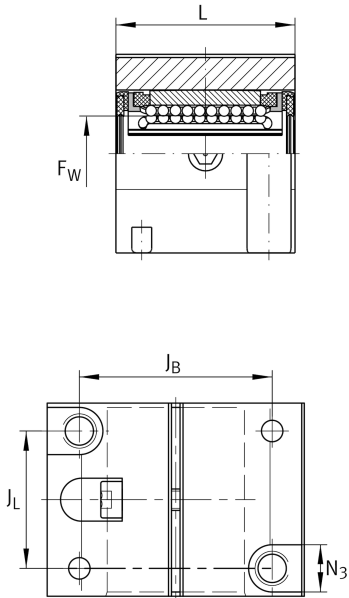

Mounting dimensions

J _B	60 mm	
B ₁	59,4 mm	
A ₅	39 mm	
Tol A ₅	+ 0,01 mm	Upper tolerance
Tol A ₅	- 0,01 mm	Lower tolerance
J _L	40 mm	Distance
Tol J _L	+ 0,15 mm	Upper tolerance
H ₂	30 mm	Center height
H ₄	41,5 mm	
H ₅	8,3 mm	
T ₅	22 mm	Mounting Dimension
H ₆	29 mm	Mounting Dimension
G ₂	M10	
N ₁	8,4 mm	Mounting Dimension
N ₄	6 mm	
N ₃	15 mm	Mounting Dimension
K ₅	M8	
K ₈	NIP5MZ	Lubrication nipple
W	5 mm	Width across flats