




KGSNS40-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu

Size 40

Seal PP

Relubrication feature AS

Technical data

8 Ball rows

≈m 1,65 kg Masa

Main Dimensions & Performance Data

F w 40 mm Diameter of ball complement


H 90 mm Height

L 80 mm Length

B 108 mm Width

C max 10.200 N Load capacity dyn.

C 0 max 9.600 N Load capacity stat.

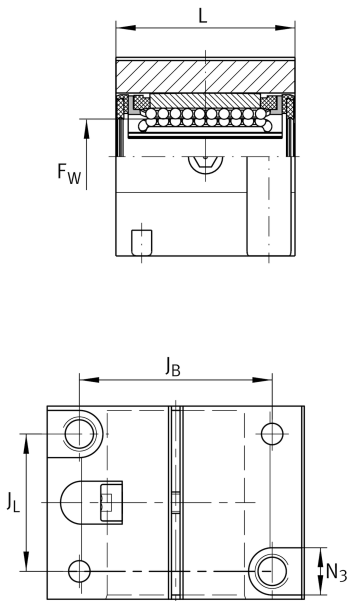

Mounting dimensions

J _B	86 mm	
B ₁	76 mm	
A ₅	54 mm	
Tol A ₅	+ 0,01 mm	Upper tolerance
Tol A ₅	- 0,01 mm	Lower tolerance
J _L	58 mm	Distance
Tol J _L	+ 0,15 mm	Upper tolerance
H ₂	45 mm	Center height
H ₄	57,6 mm	
H ₅	11,7 mm	
T ₅	26 mm	Mounting Dimension
H ₆	44 mm	Mounting Dimension
G ₂	M12	
N ₁	10,5 mm	Mounting Dimension
N ₄	8 mm	
N ₃	18 mm	Mounting Dimension
K ₅	M10	
K ₈	NIP5MZ	Lubrication nipple
W	6 mm	Width across flats