


KTB40-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

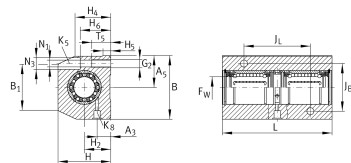

Twoja aktualna wersja produktu

Size	40
Seal	PP
Relubrication feature	AS

Main Dimensions & Performance Data

F _W	40 mm	Diameter of ball complement
Tol F _W	+ 0,013 mm	Upper tolerance
Tol F _W	- 0,002 mm	Lower tolerance
H	90 mm	Height
L	176 mm	Length
B	108 mm	Width
C	8.800 N	Load capacity dyn. C
C ₀	9.700 N	Load capacity stat. C0
m	4,07 kg	Masa



Mounting dimensions

J _B	80 mm	
Tol J _B	+ 0,15 mm	Upper tolerance
Tol J _B	- 0,15 mm	Lower tolerance
A ₅	54 mm	Mounting Dimension
B ₁	76 mm	
J _L	100 mm	
Tol J _L	+ 0,15 mm	Upper tolerance
Tol J _L	- 0,15 mm	Lower tolerance
H ₂	45 mm	Center height
Tol H ₂	+ 0,015 mm	Upper tolerance
Tol H ₂	- 0,015 mm	Lower tolerance
H ₄	56 mm	
A ₃	20 mm	
H ₅	12,4 mm	
T ₅	34 mm	
H ₆	64 mm	
N ₁	13 mm	
N ₃	20 mm	
G ₂	M16	Thread size
K ₈	NIPA2	Lubrication nipple
K ₅	M12	Screw ISO 4762