


KTBO40-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; open design, sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

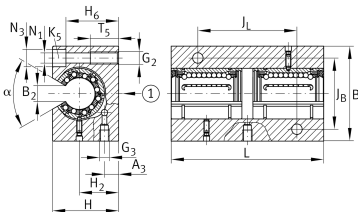

Twoja aktualna wersja produktu

Size	40
Seal	PP
Relubrication feature	AS

Main Dimensions & Performance Data

F _W	40 mm	Diameter of ball complement
H	77 mm	Height
L	176 mm	Length
B	108 mm	Width
C	9.200 N	Load capacity dyn. C
C ₀	9.900 N	Load capacity stat. C0
≈m	3,56 kg	Masa



Mounting dimensions

J _B	80 mm	
Tol J _B	+ 0,15 mm	Upper tolerance
Tol J _B	- 0,15 mm	Lower tolerance
B ₂	18,2 mm	
J _L	100 mm	
Tol J _L	+ 0,15 mm	Upper tolerance
Tol J _L	- 0,15 mm	Lower tolerance
H ₂	45 mm	Center Height
Tol H ₂	+ 0,015 mm	Upper tolerance
Tol H ₂	- 0,015 mm	Lower tolerance
A ₃	14 mm	
T ₅	34 mm	
H ₆	66 mm	
N ₁	13 mm	
N ₃	20 mm	
G ₂	M16	Thread size
G ₃	M8x1	Thread size
α	54 °	Angle
K ₅	M12	Screw DIN 6912