



**KUVS17-B**

Linear recirculating ball bearing unit

linear recirculating ball bearing units for
guideway with raceways on both sides

Informacje techniczne

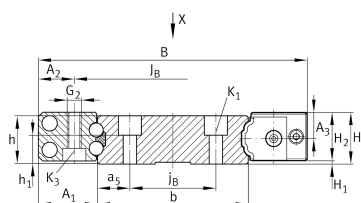

Twoja aktualna wersja produktu

Size	17
Suffix	B

Main Dimensions & Performance Data

H	18 mm	Height system
B	116 mm	Width system
L	96 mm	Length linear recirculating ball bearing units
h	17 mm	Height rail
b	71 mm	Width rail
l _{max}	2.940 mm	Max. length rail
C	26.000 N	Load capacity dyn C
C ₀	46.500 N	Load capacity dyn
M _{0X}	1.872 Nm	Moment ratings M0X
M _{0Y}	492 Nm	Moment ratings M0Y
M _{0Z}	492 Nm	Moment ratings M0Z
≈m	199 g	Masa



Mounting dimensions		
A 1	22,5 mm	
A 2	13 mm	
J B	90 mm	
j B	50 mm	
a 5	10,5 mm	
L 1	64 mm	
J L	35 mm	
j L	60 mm	
a Lmin	20 mm	
a Lmax	53 mm	
a Rmin	20 mm	
a Rmax	53 mm	
H 1	0,5 mm	Free space, system dimension
H 2	17,5 mm	Height linear recirculating ball bearing units
A 3	9,5 mm	
h 1	8,3 mm	
K 1	M5	Thread
K 1 MA	10 Nm	Tightening torque
G 2	M6	Thread
G 2 MA	10 Nm	Tightening torque
K 3	M4	Thread
K 3 MA	3 Nm	Tightening torque
d 1	6 mm	Diameter
D 2	4,9 mm	Diameter



Related products

TKVD71	Associated rail(s)
KA10-TN	Closing plug rail