



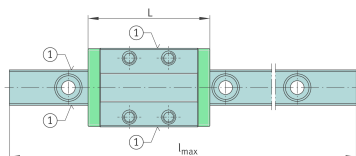


**KWEM09-E-PP-V0-G2** [↗](#)

Miniature Carriage, Standard for Miniature-Guideway, Standard

Miniature-Carriage, Standard, with end wipers; for Miniature guideway, Standard

Informacje techniczne

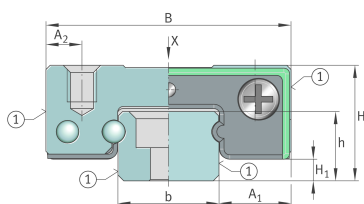

Twoja aktualna wersja produktu

Size	09	
Version	E	
Carriage design	/	Standard Design
Seal	PP	With end wipers in the end pieces
Preload class	V0	Slight clearance
Accuracy class	G2	

Main Dimensions & Performance Data

H	10 mm	Height system
B	20 mm	Width carriage
L	31 mm	Length of carriage
C	1.700 N	Dynamic load rating
C ₀	2.800 N	Basic static load capacity
M _{0x}	11,5 Nm	Static moment rating about X axis
M _{0y}	7,5 Nm	Static moment rating about Y axis
M _{0z}	7,5 Nm	Static moment rating about Z axis
≈m	21 g	Masa



Mounting dimensions

b	9 mm	Width rail
A 1	5,5 mm	Distance from locating edge on carriage to locating edge on guideway
A 2	2,5 mm	Distance from locating edge to hole
H 1	2,35 mm	Free space, system dimension
J B	15 mm	Hole spacing
J L	10 mm	Hole Spacing
T 5	3 mm	Thread depth
A 3	1,65 mm	Position lubrication connector
G2	M3	Thread size
G2 M A	1,1 Nm	Maximum tightening torque

Additional information

VMKB_065	KWEM	Material name
----------	------	---------------