




KWEM09-E-WL-PP-V0-G2

Miniature Carriage, Standard for Miniature-Guideway, Standard

Miniature-Carriage, Wide-Long design, with end wipers; for Miniature guideway, Wide design

Informacje techniczne

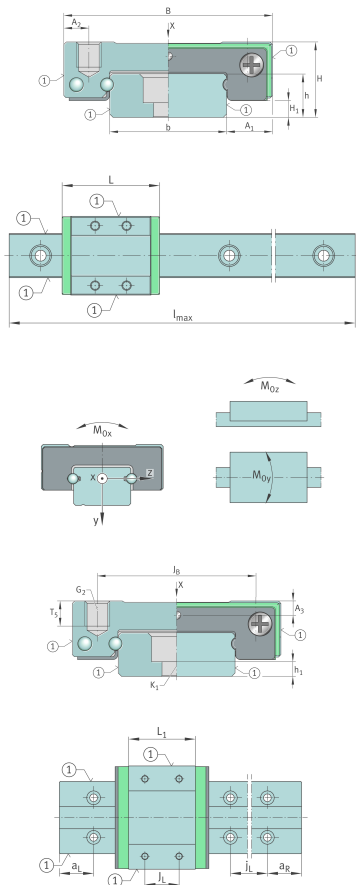

Twoja aktualna wersja produktu

Size	09	
Version	E	
Carriage design	WL	Wide, long design
Seal	PP	With end wipers in the end pieces
Preload class	V0	Slight clearance
Accuracy class	G2	

Main Dimensions & Performance Data

H	12 mm	Height system
B	30 mm	Width carriage
L	50,5 mm	Length of carriage
C	2.850 N	Dynamic load rating
C ₀	5.850 N	Basic static load capacity
M _{0x}	51,7 Nm	Static moment rating about X axis
M _{0y}	36,1 Nm	Static moment rating about Y axis
M _{0z}	36,1 Nm	Static moment rating about Z axis
≈m	68 g	Masa



Mounting dimensions

b	18 mm	Width rail
A 1	6 mm	Distance from locating edge on carriage to locating edge on guideway
A 2	4,5 mm	Distance from locating edge to hole
H 1	2,5 mm	Free space, system dimension
J B	23 mm	Hole spacing
J L	24 mm	Hole Spacing
T 5	3 mm	Thread depth
A 3	2,35 mm	Position lubrication connector
G2	M3	Thread size
G2 M A	1,1 Nm	Maximum tightening torque

Additional information

VMKB_065	KWEM	Material name
----------	------	---------------