


IMAGE
COMING SOON**KWLT15-AS-V0-G4**

Recirculating ball bearing carriage

Short flanged carriage, standard end plate,
for four-row linear recirculating ball bearing
and guideway assembly

Informacje techniczne

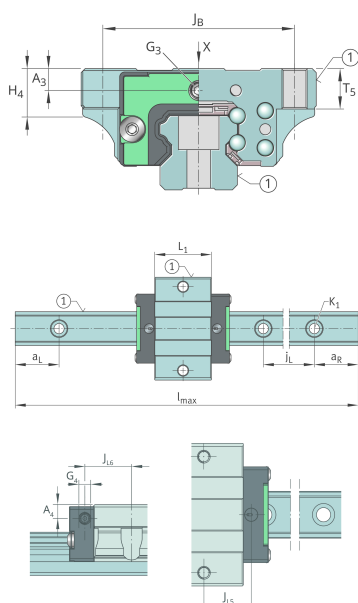

Twoja aktualna wersja produktu

Size	15	
Carriage design	AS	Short design
Preload class	V0	Slight clearance
Accuracy class	G4	

Main Dimensions & Performance Data

H	24 mm	Height system
B	47 mm	Width carriage
L	47,6 mm	Overall length carriage
C	6.300 N	Dynamic load rating
C ₀	10.800 N	Basic static load capacity
M _{0x}	95 Nm	Static moment rating about X-axis
M _{0y}	47 Nm	Static moment rating about Y-axis
M _{0z}	47 Nm	Static moment rating about Z-axis
M _{0x}	50 Nm	Dynamic moment rating about X-axis
M _{0y}	43 Nm	Dynamic moment rating about y-axis
M _{0z}	43 Nm	Dynamic moment rating about Z-axis
≈m	130 g	Masa



Mounting dimensions

A 1	16 mm	Distance from locating edge on carriage to locating edge on guideway
A 2	4,5 mm	Distance from locating edge to hole
L 1	25,6 mm	Carrier length
H 1	4,6 mm	Free space, system dimension
J B	38 mm	Hole spacing
A 3	4,3 mm	Position lubrication connector
T 5	8 mm	Thread depth
G 2	M5	Thread size, DIN ISO 4762-12.9
G2 M A	9,7 Nm	Maximum tightening torque

Additional information

VMKB_065	KWLT	Material name
----------	------	---------------