


**KWLT20-A-V1-G4**

Recirculating ball bearing carriage

Standard flanged carriage, standard end plate,  
for four-row linear recirculating ball bearing  
and guideway assembly

Informacje techniczne

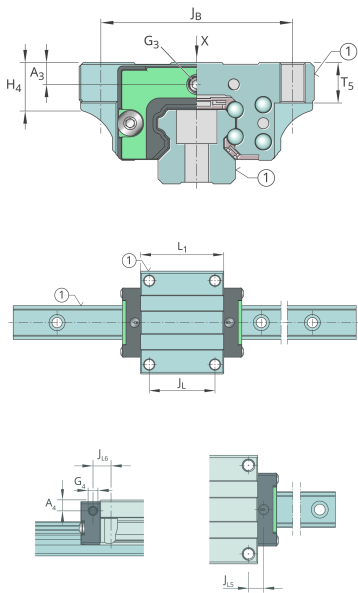

Twoja aktualna wersja produktu

|                 |    |                           |
|-----------------|----|---------------------------|
| Size            | 20 |                           |
| Carriage design | A  | Standard design           |
| Preload class   | V1 | Slight preload (standard) |
| Accuracy class  | G4 |                           |

Main Dimensions & Performance Data

|                 |          |                                    |
|-----------------|----------|------------------------------------|
| H               | 30 mm    | Height system                      |
| B               | 63 mm    | Width carriage                     |
| L               | 71,8 mm  | Overall length carriage            |
| C               | 12.300 N | Dynamic load rating                |
| C <sub>0</sub>  | 22.400 N | Basic static load capacity         |
| M <sub>0x</sub> | 244 Nm   | Static moment rating about X-axis  |
| M <sub>0y</sub> | 173 Nm   | Static moment rating about Y-axis  |
| M <sub>0z</sub> | 173 Nm   | Static moment rating about Z-axis  |
| M <sub>0x</sub> | 122 Nm   | Dynamic moment rating about X-axis |
| M <sub>0y</sub> | 154 Nm   | Dynamic moment rating about y-axis |
| M <sub>0z</sub> | 154 Nm   | Dynamic moment rating about Z-axis |
| ≈m              | 400 g    | Masa                               |



Mounting dimensions

|        |         |                                                                      |
|--------|---------|----------------------------------------------------------------------|
| A 1    | 21,5 mm | Distance from locating edge on carriage to locating edge on guideway |
| A 2    | 5 mm    | Distance from locating edge to hole                                  |
| L 1    | 50 mm   | Carrier length                                                       |
| H 1    | 5 mm    | Free space, system dimension                                         |
| J B    | 53 mm   | Hole spacing                                                         |
| J L    | 40 mm   | Hole Spacing                                                         |
| A 3    | 5,7 mm  | Position lubrication connector                                       |
| T 5    | 9 mm    | Thread depth                                                         |
| G 2    | M6      | Thread size, DIN ISO 4762-12.9                                       |
| G2 M A | 16,5 Nm | Maximum tightening torque                                            |

Additional information

|          |      |               |
|----------|------|---------------|
| VMKB_065 | KWLT | Material name |
|----------|------|---------------|