


KZK16X22X12/0-7

Needle roller cage assembly

Needle roller cage assembly KZK, single row,  
similar KZK, crank pin bearing

Informacje techniczne

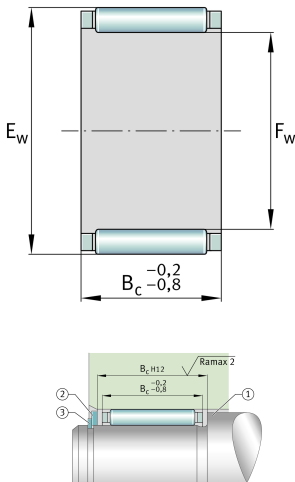

Main Dimensions & Performance Data

|             |              |                                              |
|-------------|--------------|----------------------------------------------|
| $F_w$       | 16 mm        | Inner diameter of needle roller complement   |
| $E_w$       | 22 mm        | Outside diameter of needle roller complement |
| $B_c$       | 12 mm        | Width                                        |
| $C_r$       | 11.000 N     | Basic dynamic load rating, radial            |
| $C_{0r}$    | 11.900 N     | Basic static load rating, radial             |
| $C_{ur}$    | 1.700 N      | Fatigue load limit, radial                   |
| $n_G$       | 22.900 1/min | Limiting speed                               |
| $\approx m$ | 9,38 g       | Masa                                         |

Temperature range

|           |        |                            |
|-----------|--------|----------------------------|
| $T_{min}$ | -30 °C | Operating temperature min. |
| $T_{max}$ | 140 °C | Operating temperature max. |