
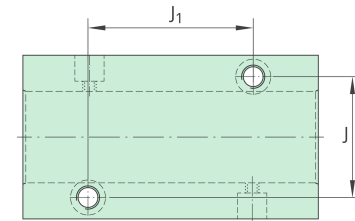



LTCF20D-2LS

Linear ball bearing and housing unit

Tandem unit, heavy duty range, self-aligning, open design, self-aligning, seals on both sides

Informacje techniczne



Twoja aktualna wersja produktu

|                 |    |
|-----------------|----|
| Size            | 20 |
| Number of seals | 2  |

Technical data

|       |                      |                      |
|-------|----------------------|----------------------|
| v max | 5 m/s                | Maximum Speed        |
| a max | 100 m/s <sup>2</sup> | Maximum Acceleration |
| ≈m    | 0,541 kg             | Masa                 |

Mounting dimensions

|     |         |                 |
|-----|---------|-----------------|
| H   | 25 mm   | Center height   |
| J 1 | 55 mm   |                 |
| J   | 45 mm   |                 |
| E   | 10,8 mm | Width of cutout |
| N 1 | M8      | Thread          |
| L   | 60 mm   |                 |
| A   | 104 mm  | Length          |
| α   | 60 °    | Angle           |



Main Dimensions & Performance Data

|         |         |                     |
|---------|---------|---------------------|
| N       | 6,4 mm  | Bore diameter       |
| H 2     | 33,5 mm | Height              |
| D a     | 32 mm   | Bore diameter       |
| F W     | 20 mm   | Bore diameter       |
| C       | 45 mm   | Length              |
| C max   | 4.050 N | Load capacity dyn.  |
| C min   | 2.360 N | Load capacity dyn.  |
| C 0 min | 1.830 N | Load capacity stat. |
| C 0 max | 3.660 N | Load capacity stat. |

Dimensions

|     |       |        |
|-----|-------|--------|
| H 1 | 42 mm | Height |
| H 3 | 18 mm | Height |