




LTCR20D-2LS

Linear ball bearing and housing unit

Tandem unit, heavy duty range, seals on both sides

Informacje techniczne

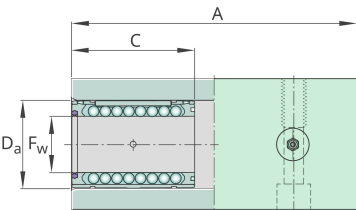

Twoja aktualna wersja produktu

Size 20

Number of seals 2

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s² Maximum Acceleration

m 0,696 kg Masa

Mounting dimensions

H 25 mm Center height

J 1 55 mm

J 45 mm

N 1 M8 Thread

L 60 mm

A 104 mm Length



Main Dimensions & Performance Data

N	6,4 mm	Bore diameter
H 2	39,5 mm	Height
D a	32 mm	Bore diameter
F W	20 mm	Bore diameter
C	45 mm	Length
C max	5.300 N	Load capacity dyn.
C min	3.550 N	Load capacity dyn.
C 0 min	3.250 N	Load capacity stat.
C 0 max	5.300 N	Load capacity stat.

Dimensions

H 1	49,5 mm	Height
H 3	18 mm	Height