
**LTCR30D-2LS**

Linear ball bearing and housing unit

Tandem unit, heavy duty range, seals on both sides

Informacje techniczne

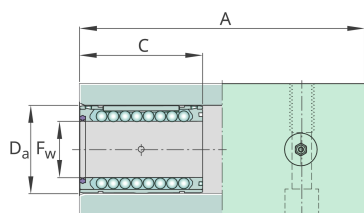

Twoja aktualna wersja produktu



Size	30
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	1,942 kg	Masa

Mounting dimensions

H	35 mm	Center height
J ₁	85 mm	
J	62 mm	
N ₁	M12	Thread
L	84 mm	
A	152 mm	Length

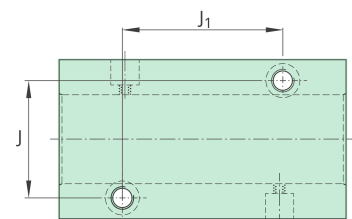



Main Dimensions & Performance Data

N	10,5 mm	Bore diameter
H 2	55 mm	Height
D a	47 mm	Bore diameter
F W	30 mm	Bore diameter
C	68 mm	Length
C max	11.600 N	Load capacity dyn.
C min	7.800 N	Load capacity dyn.
C 0 min	7.100 N	Load capacity stat.
C 0 max	11.400 N	Load capacity stat.

Dimensions

H 1	69,5 mm	Height
H 3	26 mm	Height