




LTCR40D-2LS

Linear ball bearing and housing unit

Tandem unit, heavy duty range, seals on both sides

Informacje techniczne

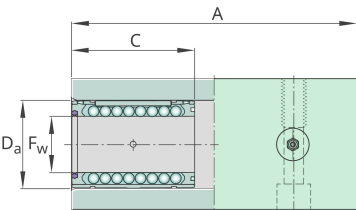

Twoja aktualna wersja produktu

Size 40

Number of seals 2

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s2 Maximum Acceleration

m 3,683 kg Masa

Mounting dimensions

H 45 mm Center height

J 1 100 mm

J 80 mm

N 1 M16 Thread

L 108 mm

A 176 mm Length



Main Dimensions & Performance Data

N	13 mm	Bore diameter
H 2	71 mm	Height
D a	62 mm	Bore diameter
F W	40 mm	Bore diameter
C	80 mm	Length
C max	18.300 N	Load capacity dyn.
C min	12.500 N	Load capacity dyn.
C 0 min	10.200 N	Load capacity stat.
C 0 max	16.600 N	Load capacity stat.

Dimensions

H 1	89,5 mm	Height
H 3	34 mm	Height