




LTCR50A-2LS

Linear ball bearing and housing unit

Tandem unit, heavy duty range, seals on both sides

Informacje techniczne

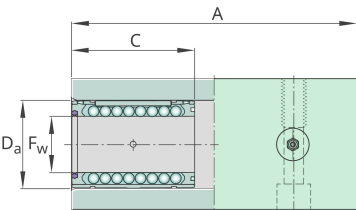

Twoja aktualna wersja produktu

Size 50

Number of seals 2

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s² Maximum Acceleration

m 5,97 kg Masa

Mounting dimensions

H 50 mm Center height

J 1 125 mm

J 100 mm

N 1 M16 Thread

L 130 mm

A 224 mm Length



Main Dimensions & Performance Data

N	13 mm	Bore diameter
H 2	81 mm	Height
D a	75 mm	Bore diameter
F W	50 mm	Bore diameter
C	100 mm	Length
C max	21.600 N	Load capacity dyn.
C min	15.600 N	Load capacity dyn.
C 0 min	14.300 N	Load capacity stat.
C 0 max	24.500 N	Load capacity stat.

Dimensions

H 1	99,5 mm	Height
H 3	34 mm	Height