


LUCE20D

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, clearance adjustable, shielded, stainless steel

Informacje techniczne

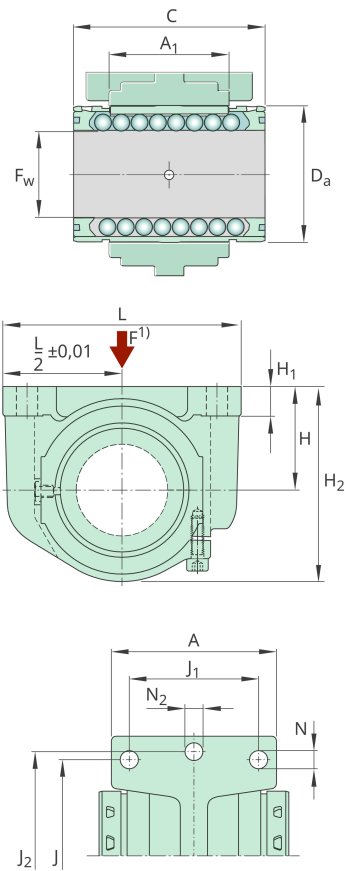

Twoja aktualna wersja produktu

Size	20
Number of seals	0

Technical data

v max	5 m/s	Maximum Speed
a max	100 m/s ²	Maximum Acceleration
≈m	159 g	Masa

Mounting dimensions

A 1	28 mm	Length
H	25 mm	Center height
J 1	32 mm	
J	45 mm	
L	70 mm	
J 2	58 mm	
A	41 mm	Length



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	4,3 mm	Bore diameter
H ₂	48 mm	Height
D _a	32 mm	Bore diameter
F _W	20 mm	Bore diameter
C	45 mm	Length
C _{max}	2.550 N	Load capacity dyn.
C _{min}	1.730 N	Load capacity dyn.
C _{0 min}	1.120 N	Load capacity stat.
C _{0 max}	1.800 N	Load capacity stat.

Dimensions

H ₁	8 mm	Height of Carriage
----------------	------	--------------------