


**LUCE40D**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, clearance adjustable, shielded, stainless steel

Informacje techniczne

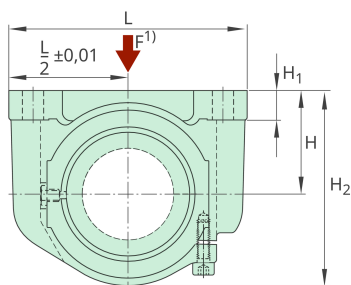

Twoja aktualna wersja produktu

Size	40
Number of seals	0

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
$\approx m$	0,788 kg	Masa

Mounting dimensions

A ₁	56 mm	Length
H	45 mm	Center height
J ₁	58 mm	
J	86 mm	
L	108 mm	
J ₂	94 mm	
A	74 mm	Length



Main Dimensions & Performance Data

N ₂	8,4 mm	Bore diameter
N	8,4 mm	Bore diameter
H ₂	85 mm	Height
D _a	62 mm	Bore diameter
F _W	40 mm	Bore diameter
C	80 mm	Length
C _{max}	9.650 N	Load capacity dyn.
C _{min}	6.550 N	Load capacity dyn.
C _{0 min}	3.350 N	Load capacity stat.
C _{0 max}	5.700 N	Load capacity stat.

Dimensions

H ₁	12 mm	Height of Carriage
----------------	-------	--------------------