




LUCT50

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, open design, shielded

Informacje techniczne

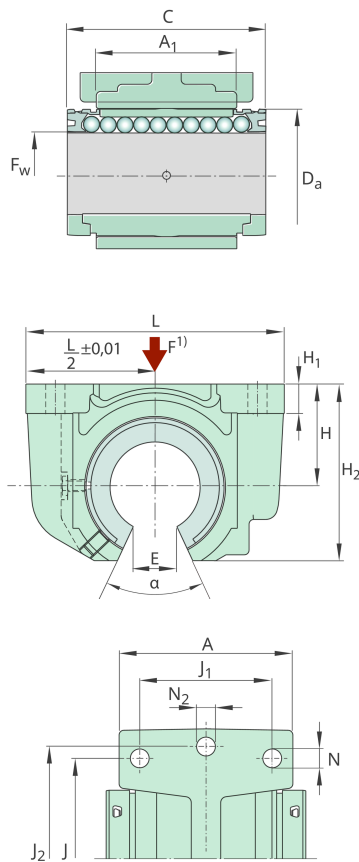

Twoja aktualna wersja produktu

Size	50
Number of seals	0

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	1,055 kg	Masa

Mounting dimensions

A_1	72 mm	Length
H	50 mm	Center height
J_1	50 mm	
J	108 mm	
E	23,6 mm	Width of cutout
L	135 mm	
J_2	116 mm	
A	66 mm	Length
α	50 °	Angle



Main Dimensions & Performance Data

N ₂	10,5 mm	Bore diameter
N	8,4 mm	Bore diameter
H ₂	88 mm	Height
D _a	75 mm	Bore diameter
F _W	50 mm	Bore diameter
C	100 mm	Length
C _{max}	13.400 N	Load capacity dyn.
C _{min}	5.850 N	Load capacity dyn.
C _{0 min}	5.300 N	Load capacity stat.
C _{0 max}	12.200 N	Load capacity stat.

Dimensions

H ₁	14 mm	Height of Carriage
----------------	-------	--------------------