
**LUNF30D-2LS-HV6**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, open design, seals on both sides, stainless steel

Informacje techniczne



Twoja aktualna wersja produktu



Size	30
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	0,694 kg	Masa

Mounting dimensions

H	35 mm	Center height
J_1	45 mm	
J	68 mm	
E	14,2 mm	Width of cutout
N_1	M10	Thread
L	87 mm	
A	68 mm	Length
α	50 °	Angle

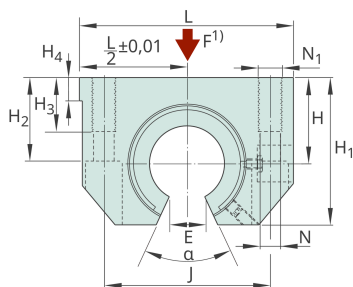



Main Dimensions & Performance Data

N	8,4 mm	Bore diameter
H 2	34 mm	Height
D a	47 mm	Bore diameter
F W	30 mm	Bore diameter
C max	5.700 N	Load capacity dyn.
C min	3.250 N	Load capacity dyn.
C 0 min	1.960 N	Load capacity stat.
C 0 max	3.900 N	Load capacity stat.

Dimensions

H 1	60 mm	Height
H 3	22 mm	Height
H 4	9,5 mm	Height