
**LUNF50A-2LS-HV6**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, open design, seals on both sides, stainless steel

Informacje techniczne



Twoja aktualna wersja produktu



Size	50
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	2,021 kg	Masa

Mounting dimensions

H	50 mm	Center height
J_1	50 mm	
J	108 mm	
E	23,6 mm	Width of cutout
N_1	M16	Thread
L	132 mm	
A	100 mm	Length
α	50 °	Angle

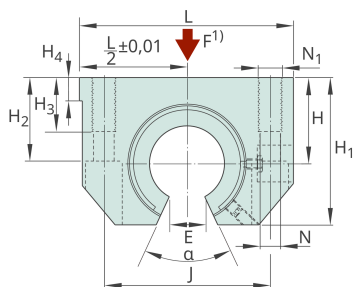



Main Dimensions & Performance Data

N	13,5 mm	Bore diameter
H 2	49 mm	Height
D a	75 mm	Bore diameter
F W	50 mm	Bore diameter
C max	11.200 N	Load capacity dyn.
C min	4.900 N	Load capacity dyn.
C 0 min	3.000 N	Load capacity stat.
C 0 max	6.950 N	Load capacity stat.

Dimensions

H 1	88 mm	Height
H 3	35 mm	Height
H 4	11 mm	Height