


**LVCR60-2LS**

Linear ball bearing and housing unit

Flanged bearing unit, heavy duty range, seals on both sides

Informacje techniczne

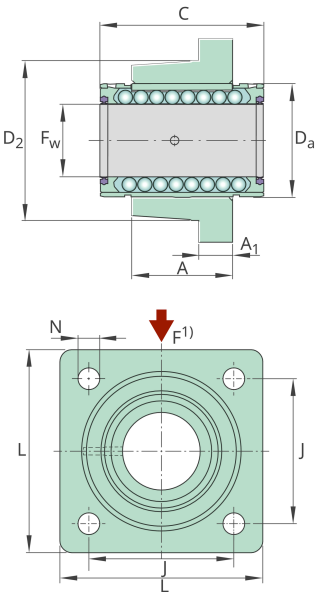

Twoja aktualna wersja produktu

|                 |    |
|-----------------|----|
| Size            | 60 |
| Number of seals | 2  |

Technical data

|           |                      |                      |
|-----------|----------------------|----------------------|
| $v_{max}$ | 5 m/s                | Maximum Speed        |
| $a_{max}$ | 100 m/s <sup>2</sup> | Maximum Acceleration |
| $m$       | 5,92 kg              | Masa                 |

Mounting dimensions

|       |        |                              |
|-------|--------|------------------------------|
| $A_1$ | 22 mm  | Length                       |
| J     | 120 mm |                              |
| L     | 160 mm |                              |
| $D_2$ | 135 mm | Diameter of centering collar |
| A     | 95 mm  | Length                       |



Main Dimensions & Performance Data

|                    |          |                     |
|--------------------|----------|---------------------|
| N                  | 13,5 mm  | Bore diameter       |
| D <sub>a</sub>     | 90 mm    | Bore diameter       |
| F <sub>W</sub>     | 60 mm    | Bore diameter       |
| C                  | 125 mm   | Length              |
| C <sub>max</sub>   | 20.400 N | Load capacity dyn.  |
| C <sub>min</sub>   | 14.600 N | Load capacity dyn.  |
| C <sub>0 min</sub> | 11.200 N | Load capacity stat. |
| C <sub>0 max</sub> | 18.000 N | Load capacity stat. |