






FAG

N1018-D-K-PVPA1-SP-XL

Cylindrical roller bearing

Super precision cylindrical roller bearings
N10..-D-K-PVPA1-SP-XL, Non-locating
bearing, with tapered bore, taper 1:12,
separable, with cage

Informacje techniczne

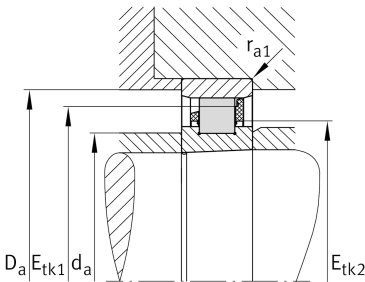

Twoja aktualna wersja produktu

Cage	PVPA1	PEEK-cage
Tolerance class	SP	Tolerance class SP
Bore type	K	Tapered, taper 1:12
Change mark	D	Internal Variant D
Radial internal clearance	C1 (Group 1)	Internal clearance smaller than C2
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	90 mm	Bore diameter
D	140 mm	Outside diameter
B	24 mm	Width
C _r	89.000 N	Basic dynamic load rating, radial
C _{0r}	100.000 N	Basic static load rating, radial
C _{ur}	15.500 N	Fatigue load limit, radial
n _{G Grease}	12.700 1/min	Limiting speed for grease lubrication
n _{G Oil}	15.000 1/min	Limiting speed for oil lubrication
≈m	1,18 kg	Masa



Mounting dimensions

d_a	105 mm	Diameter shaft shoulder
h_{12}		Diameter shaft shoulder tolerance
D_a	128,5 mm	Diameter of housing shoulder
H_{12}		Diameter of housing shoulder tolerance
$E_{tk1\text{ nom}}$	124 mm	Injection pitch diameter min
$E_{tk2\text{ nom}}$	111,1 mm	Injection pitch diameter nom
$r_{a1\text{ max}}$	1 mm	Maximum recess radius

Dimensions

$r_{1\text{ min}}$	1,1 mm	Minimum chamfer dimension
s_1	2,2 mm	Axial displacement
s_2	4,4 mm	Axial displacement
E	127 mm	Raceway diameter outer ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	150 °C	Operating temperature max.

Właściwości

	Obciążenie promieniowe
	Smarowanie smarem
	Smarowanie olejem
	Bez uszczelnienia