



NA6917-ZW-XL-C3

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

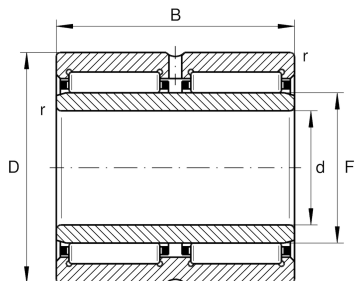

Twoja aktualna wersja produktu

|                           |              |                                   |
|---------------------------|--------------|-----------------------------------|
| Cage                      | Standard     |                                   |
| Cage feature              | Standard     |                                   |
| Radial internal clearance | C3 (Group 3) | Internal clearance larger than CN |
| Special features          | Standard     |                                   |
| Number of rows            | ZW           | Double-row design                 |

Main Dimensions & Performance Data

|                 |             |                                   |
|-----------------|-------------|-----------------------------------|
| d               | 85 mm       | Bore diameter                     |
| D               | 120 mm      | Outside diameter                  |
| B               | 63 mm       | Width                             |
| C <sub>r</sub>  | 188.000 N   | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 400.000 N   | Basic static load rating, radial  |
| C <sub>ur</sub> | 72.000 N    | Fatigue load limit, radial        |
| n <sub>G</sub>  | 4.600 1/min | Limiting speed                    |
| n <sub>gr</sub> | 2.700 1/min | Reference speed                   |
| ≈m              | 2,264 kg    | Masa                              |



Dimensions

|                  |        |                             |
|------------------|--------|-----------------------------|
| F                | 100 mm | Raceway diameter inner ring |
| r <sub>min</sub> | 1,1 mm | Minimum chamfer dimension   |
| s                | 1 mm   | Axial displacement          |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy