



NA6918-ZW-XL

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

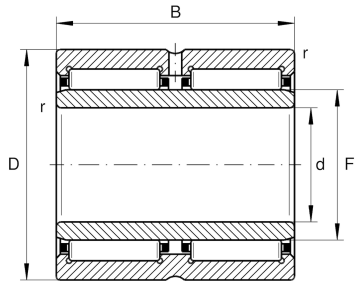

Twoja aktualna wersja produktu

Cage	Standard	
Cage feature	Standard	
Radial internal clearance	CN (Group N)	Normal internal clearance
Special features	Standard	
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

d	90 mm	Bore diameter
D	125 mm	Outside diameter
B	63 mm	Width
C _r	195.000 N	Basic dynamic load rating, radial
C _{0r}	425.000 N	Basic static load rating, radial
C _{ur}	76.000 N	Fatigue load limit, radial
n _G	4.400 1/min	Limiting speed
n _{gr}	2.550 1/min	Reference speed
≈m	2,405 kg	Masa



Dimensions

F	105 mm	Raceway diameter inner ring
r _{min}	1,1 mm	Minimum chamfer dimension
s	1 mm	Axial displacement

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy